


MALE/FEMALE REDUCED BORE BALL VALVE BSP

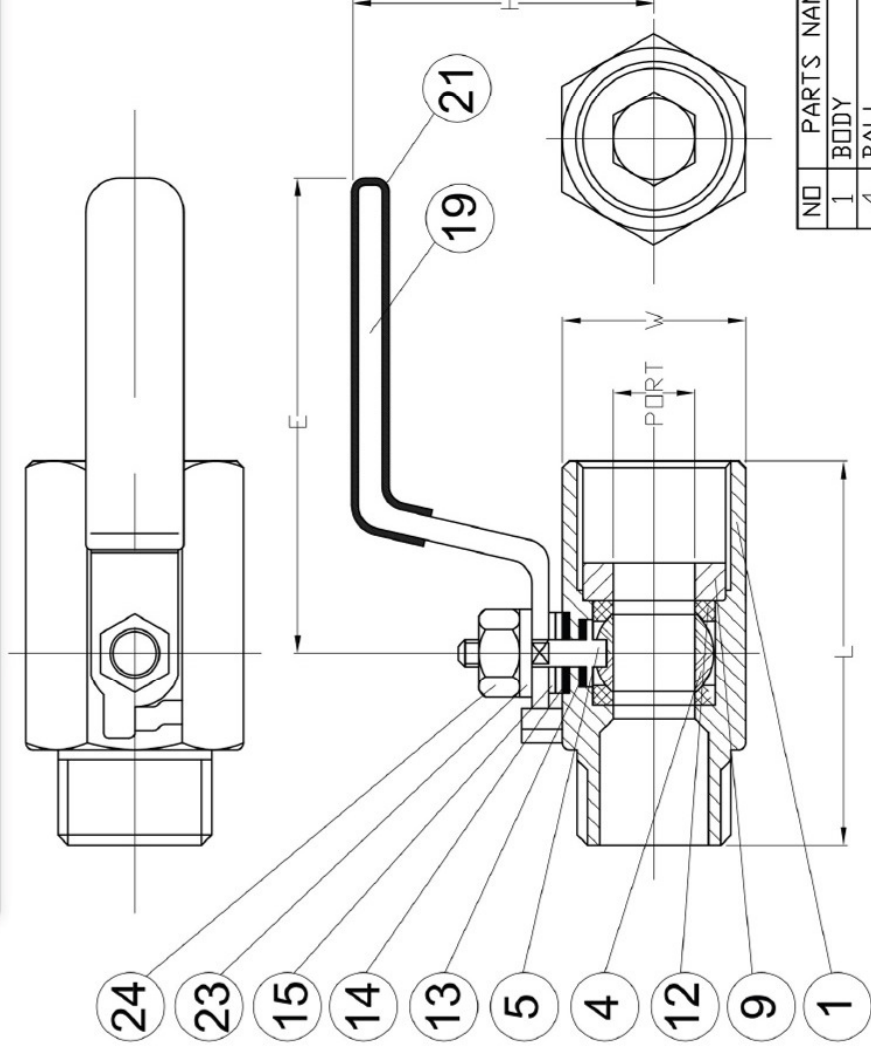

NO	PARTS NAME	MATERIAL
1	BODY	CF8M
4	BALL	SS316/CF8M
5	STEM	SS316
9	INSERT	CF8M
12	SEAT	PTFE.
13	THRUST WASHER	PTFE.
14	STEM PACKING	PTFE.
15	GLAND WASHER	SS304
19	HANDLE	SS304
21	HANDLE COVER	PLASTIC
23	HANDLE WASHER	SS304
24	HANDLE NUT	SS304

Size: 1/4"-1"

Full bore

Threaded ends: Female ISO228/1 BSPP, Male ISO7-1 BSPT

Quality investment casting body and cap


Internal entry blow-out proof stem

Material: CF8M 316

Pressure rating 1000PSI(WOG)

Pressure test: API 598

PRESSURE TEMPERATURE RATINGS

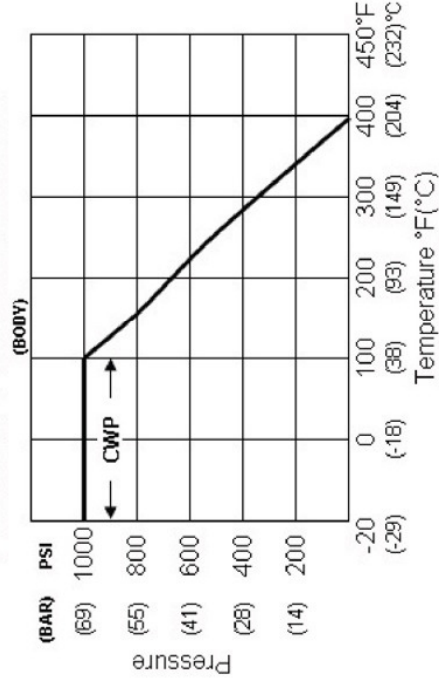

SIZE BSP	PART No	PORT	L	E	H	W	CV FACTOR	Kg
1/4	MFRBV04	5.0	46.0	70.0	27.0	16.0	3.8	0.08
3/8	MFRBV06	7.2	51.0	81.0	28.5	21.5	4.0	0.13
1/2	MFRBV08	9.2	59.0	96.0	44.5	24.5	4.5	0.21
3/4	MFRBV12	12.5	62.5	96.0	46.0	32.0	9.0	0.40
1	MFRBV16	15	76.8	103.0	53.0	38.0	10.0	0.68