


Two-layer soft PVC hose with embedded galvanised steel spiral with polyester yarn reinforcement, for suction and delivery of liquids. For waste water systems of boats.

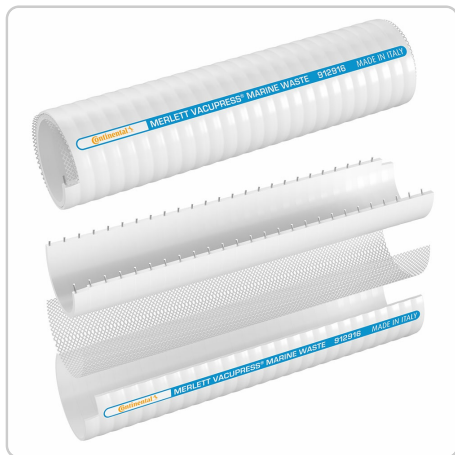

Ø nominal mm	Ø nominal inch	Ø i.d. mm	Ø o.d. mm	vacuum 23° m/H ₂ O	working press. at 23° r.1:3 bar	working press. at 23° r.1:4 bar	bursting press. at 23° bar	bending radius mm	total thickness mm	Ø steel wire mm	spiral pitch mm	spiral direction	weight meter g/m	coil length m	Availability
19		19	28	9	20	16	70	70	4.5	1	8.5	right	475	60	On demand
25		25	36	9	16	12	52	80	5.5	1.2	9	right	680	60	On demand
32		32	42.5	9	16	12	48	100	5.3	1.2	9.5	right	800	60	On demand
38		38	51	9	14	10	42	125	6.5	1.4	10.5	right	1150	30	On demand
50		50	63.5	9	12	10	41	150	6.8	1.6	11	right	1600	30	On demand
51	2	51	64	9	12	10	41	150	6.5	1.6	9		1600	20	On demand
60		60	74	9	12	10	40	180	7	1.6	11	right	1980	30	On demand

SMOOTH SURFACE *****

FLEXIBILITY *****

TEMPERATURE RANGE
-25 °c 60 °c

CHEMICAL RESISTANCE
PVC Table

CRUSHING RESISTANCE *****

WASTE WATER TANK SYSTEM *****