


Multilayer rubber hose with embedded galvanised steel spiral with polyester yarn reinforcement, for suction and ducting of corrosive liquids.

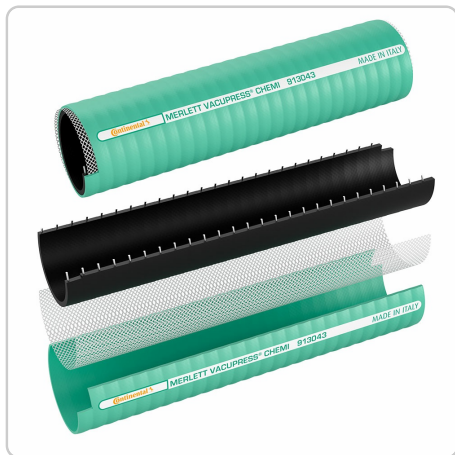

SMOOTH SURFACE \*\*\*\*\*

FLEXIBILITY \*\*\*\*\*

TEMPERATURE RANGE  
-25 °c 80 °c

CHEMICAL RESISTANCE  
TPV Table

CRUSHING RESISTANCE \*\*\*\*\*

Ø nominal mm	Ø nominal inch	Ø i.d. mm	Ø o.d. mm	vacuum 23° m/H <sub>2</sub> O	working press. at 23° r.1:3 bar	working press. at 23° r.1:4 bar	working press. at 60° bar	bursting press. at 23° bar	bending radius mm	total thickness mm	Ø steel wire mm	spiral pitch mm	spiral direction	weight meter g/m	coil length m	Availability
19	3/4	19	28	9	15	10	8	45	70	4.5	1	8.5	right	380	60	On demand
22		22	31.5	9	14	10	6	42	75	4.5	1.2	9	right	450	60	On demand
25	1	25	35.5	9	14	10	6	42	80	5.25	1.4	10	right	580	60	In stock
30		30	40.5	9	10	8	6	30	85	5.3	1.4	10	right	650	60	On demand
32	1 1/4	32	42.5	9	10	8	6	30	90	5.3	1.4	10	right	730	60	In stock
35		35	47	9	10	8	6	30	95	6	1.4	10	right	850	60	On demand
38	1 1/2	38	50	9	10	8	6	30	100	6	1.4	10.5	right	920	30	In stock
40		40	52.5	9	10	8	6	30	110	6.3	1.4	11	right	970	30	In stock
45	1 3/4	45	57	9	10	8	6	30	120	6	1.4	11	right	1100	30	On demand
50	2	50	62.5	9	10	8	5	30	130	6.3	1.6	11	right	1280	30	In stock
53		53	66	9	10	8	5	30	140	6.5	1.6	11	right	1350	30	On demand
60		60	73	9	9	7	4	27	160	6.5	1.6	11	right	1550	30	In stock
63	2 1/2	63	76	9	9	7	4	27	180	6.5	1.6	11	right	1600	30	In stock
76	3	76	91	9	8	6	4	24	230	7.5	2	13.5	right	2350	30	In stock
80		80	95	9	8	6	4	24	250	7.5	2	14	right	2400	30	In stock
90	3 1/2	90	105.5	9	8	6	4	24	280	7.8	2	14	right	2750	30	On demand
102	4	102	118.5	9	7	5	3	21	310	8.3	2	14.5	right	3100	30	On demand