


# HUSKY BREAKAWAY VALVES

## FOR TRUCK AND HIGH VOLUME FUELING

### Husky Model 2276 Safe-T-Break®

- All Husky Safe-T-Breaks® stop the flow of fuel on both sides of the separation.
- Internal pressure balancing chamber prevents “line shock” nuisance separations.
- Separates at less than 200 lbs. pull force which minimizes “back lash” force of separations, reducing damage to equipment.
- Unit quickly and easily snaps back together after driveaway break.

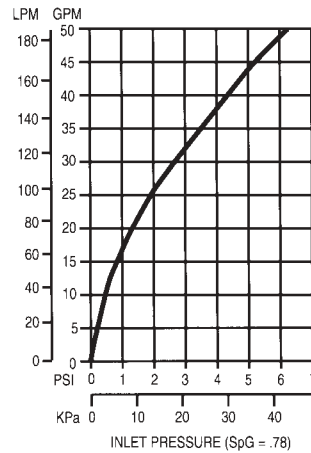

- Unit retains U.L. listing after separation and reconnecting.

### SPECIFYING INFORMATION

Model Number	Description	Weight Lbs. (kg.)
2276	1" F x 1" F NPT Reconnectable Safe-T-Break®	.71 (.32)

### CONSTRUCTION

Body	Aluminum
Seals	Viton® (Fluorocarbon)
Springs	Stainless Steel
Threads	1" NPT, BSP
Stainless steel load and latch spring reverse mechanism.	
Hardened stainless steel latch ring and balls.	

### PATENTS AND LISTINGS

Patent Nos.	4,827,977
Listings	US LISTED

Viton® is a registered trademark of DuPont Dow Elastomers.



Model 2276

TRUCK & HIGH VOLUME

# HUSKY BREAKAWAY VALVES

## FOR TRUCK AND HIGH VOLUME FUELING

- ACCESSORIES
- FEATURES
- DIMENSIONS

### ACCESSORIES

Model No.	Use with Valve No.	Description
2277	2276	1" M x 1" M Hose
1551	2276	Scuff Guard

