Osprey S Nozzle



Automatic shut-off nozzle for over-the-wing fueling of aircraft.

- Specifically designed for business and private overthe-wing aviation fueling.
- Osprey S nozzle prevents draining of fuel from fueling hose. The nozzle shuts off when
 - the pump shuts off.
- the fuel tank is full.
- the lever is opened before the pump is turned on.
- Easy to remove and clean 100 mesh SS fuel filter assembly.
- Nozzle comes with red full grip guard to identify use only with AvGas or black full grip guard for jet fuel application if desired.

 Complies with IE1540 and NPA 407.



MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS. (KG)
1212312N^	without Hold Open Clip a Splash Guard and mesh f	and Spout Bushing, with Waffle filter 4.6 (2.0)
		^ NOT LISTED


Osprey S Nozzle with BSPP

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS. (KG)
1212340N^	N^ without Hold Open Clip and Spout Bushing, with Waffle	
	Splash Guard and mesh filter	4.6 (2.0)
		^ NOT LISTED

Construction

Aluminum
Fluorocarbon
Double o-ring seal protected by fiber reinforced Teflon®
One piece contoured steel
1" / 25.4 mm NPT and BSPP







Osprey S Nozzle

Automatic shut-off nozzle for over-the-wing fueling of aircraft.


Dimensions and System Options

Swivels

MODEL NO.	DESCRIPTION	
008517	1" M x 1" F NPT Single Plane Swivel	
004860	1" M x 1" F NPT Multi-Plane High Flow Swivel	
003306	1" M x 1" F BSPP Multi-Plane Swivel	
006949	1" M x 1" F BSPP Mult-Plane High Flow Swivel	

Accessories

MODEL NO.	DESCRIPTION
011817	Electrical Grounding Plug
012139	Osprey S Spout Assembly Kit
011946	Spout Cap Assembly
012148	Strainer BSP Kit
012143	Strainer NPT Kit

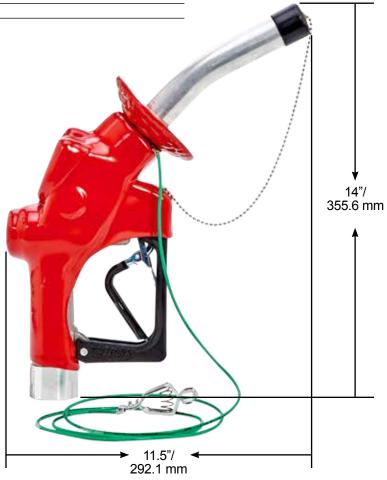



2325 Husky Way • Pacific, MO 63069 (800) 325-3558 • Fax (636) 825-7300 www.husky.com • sales@husky.com

