

Submersible pumps in stainless steel

 Sewage water

 Domestic use

 Civil use

 Industrial use



PERFORMANCE RANGE

- Flow rate up to **750 l/min** (45 m³/h)
- Head up to **15 m**

APPLICATION LIMITS

- **5 m** maximum immersion depth
- Maximum liquid temperature **+40 °C**
- Passage of suspended solids up to **Ø 50 mm**
- Minimum immersion depth for continuous service: **300 mm**

CONSTRUCTION AND SAFETY STANDARDS

- **10 m** long power cable
- Float switch for single-phase versions

EN 60335-1
IEC 60335-1
CEI 61-150

EN 60034-1
IEC 60034-1
CEI 2-3



CERTIFICATIONS

Company with management system certified DNV
ISO 9001: QUALITY



INSTALLATION AND USE

BC-ST submersible pumps in stainless steel are recommended for draining **dirty and sewage water** in domestic, civil and industrial applications. They come equipped with a **DOUBLE-CHANNEL** impeller and are capable of pumping liquids containing short fibred suspended solids up to Ø 50 mm. They are ideal for pumping sewage, waste water, surface water and water mixed with mud in locations such as blocks of flats and detached houses.

These pumps distinguish themselves for their reliability, which can be best appreciated under automatic operating conditions in fixed installations.

PATENTS - TRADE MARKS - MODELS


- Patent n° EP2313658
- Patent Pending n° BO2015A000116

OPTIONS AVAILABLE ON REQUEST

- Single-phase pumps without float switch
- AISI 316L stainless steel pump shaft
- Other voltages or 60 Hz frequency

CHARACTERISTIC CURVES AND PERFORMANCE DATA

50 Hz n= 2900 min⁻¹

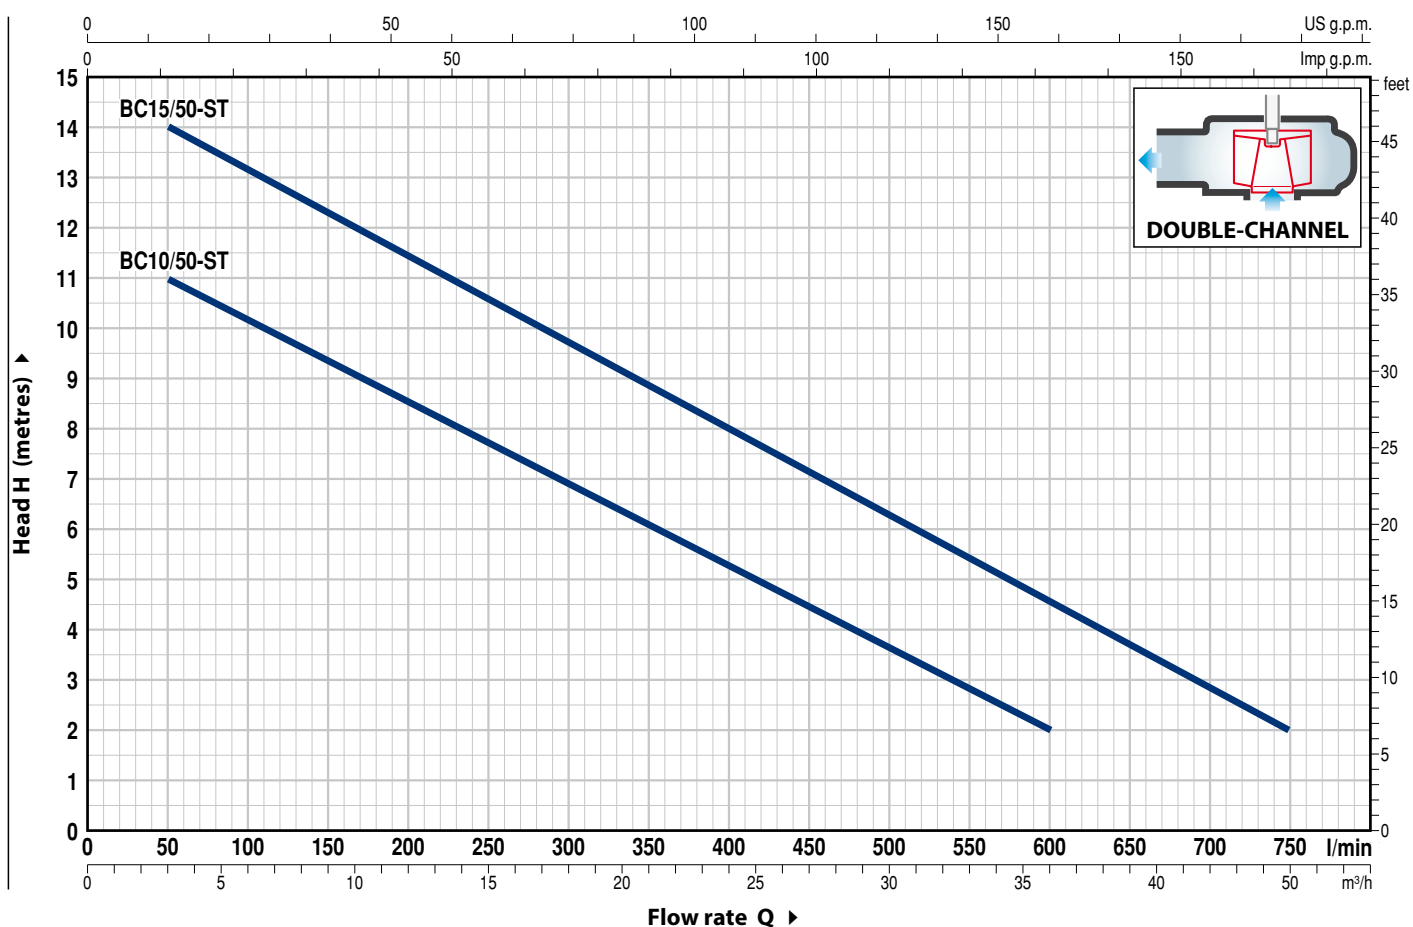

MODEL		POWER (P ₂)		Q m³/h l/min	0	3	6	12	18	24	30	36	42	45
Single-phase	Three-phase	kW	HP		0	50	100	200	300	400	500	600	700	750
BCm 10/50-ST	BC 10/50-ST	0.75	1	H metres	12	11	10	8.5	7	5	3.6	2		
BCm 15/50-ST	BC 15/50-ST	1.1	1.5		15	14	13	11.5	9.7	8	6.3	4.6	2.9	2

Q = Flow rate H = Total manometric head

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.

POS. COMPONENTCONSTRUCTION CHARACTERISTICS


1	PUMP BODY	Stainless steel AISI 304 with threaded port in compliance with ISO 228/1			
2	BASE	Stainless steel AISI 304			
3	IMPELLER	Precision cast stainless steel AISI 304 DOUBLE-CHANNEL type			
4	MOTOR CASING	Stainless steel AISI 304			
5	MOTOR CASING PLATE	Stainless steel AISI 304			
6	MOTOR SHAFT	Stainless steel AISI 431			
7	SHAFT WITH DOUBLE MECHANICAL SEAL SEPARATED BY AN OIL CHAMBER				
	Seal	Shaft	Position	Materials	
	Model	Diameter		Stationary ring	Rotational ring
	MG1-14D SIC	Ø 14 mm	Motor side	Silicon carbide	Graphite
			Pump side	Silicon carbide	Silicon carbide
					Elastomer
					NBR
					NBR
8	BEARINGS	6203 ZZ / 6203 ZZ			

9	CAPACITOR				
<i>Pump</i>		<i>Capacitance</i>			
<i>Single-phase</i>		<i>(220-230 V or 240 V)</i>	<i>(110 V)</i>		
BCm 10/50-ST		20 µF 450 VL	30 µF - 250 VL		
BCm 15/50-ST		25 µF 450 VL	–		


10	ELECTRIC MOTOR				
BCm:		single-phase 220-230 V - 50 Hz			
		with thermal overload protector incorporated into the winding			
BC:		three-phase 400 V - 50 Hz			
		– Insulation: class F			
		– Protection: IP X8			

11	POWER CABLE				
		“H07 RN-F” type			
		(with Schuko plug for single-phase versions only)			
		Standard length 10 metres			

12	FLOAT SWITCH				
		(only for single-phase versions)			

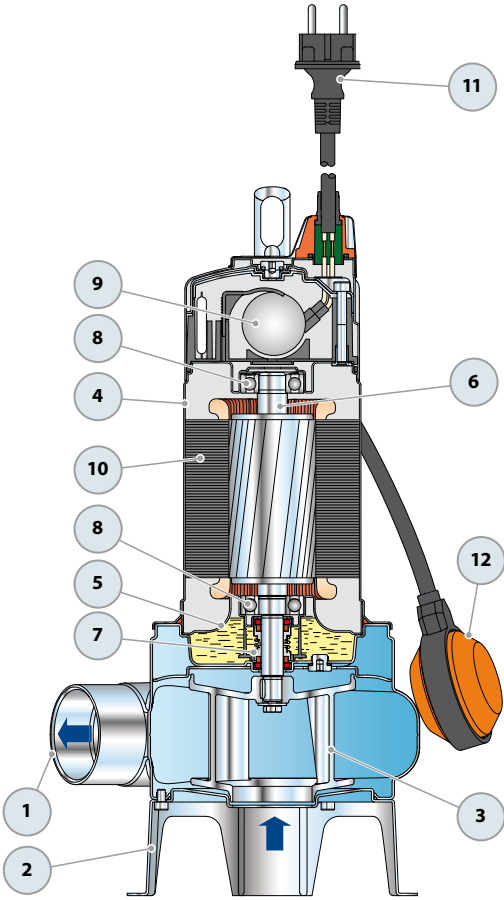

DIMENSIONS AND WEIGHT

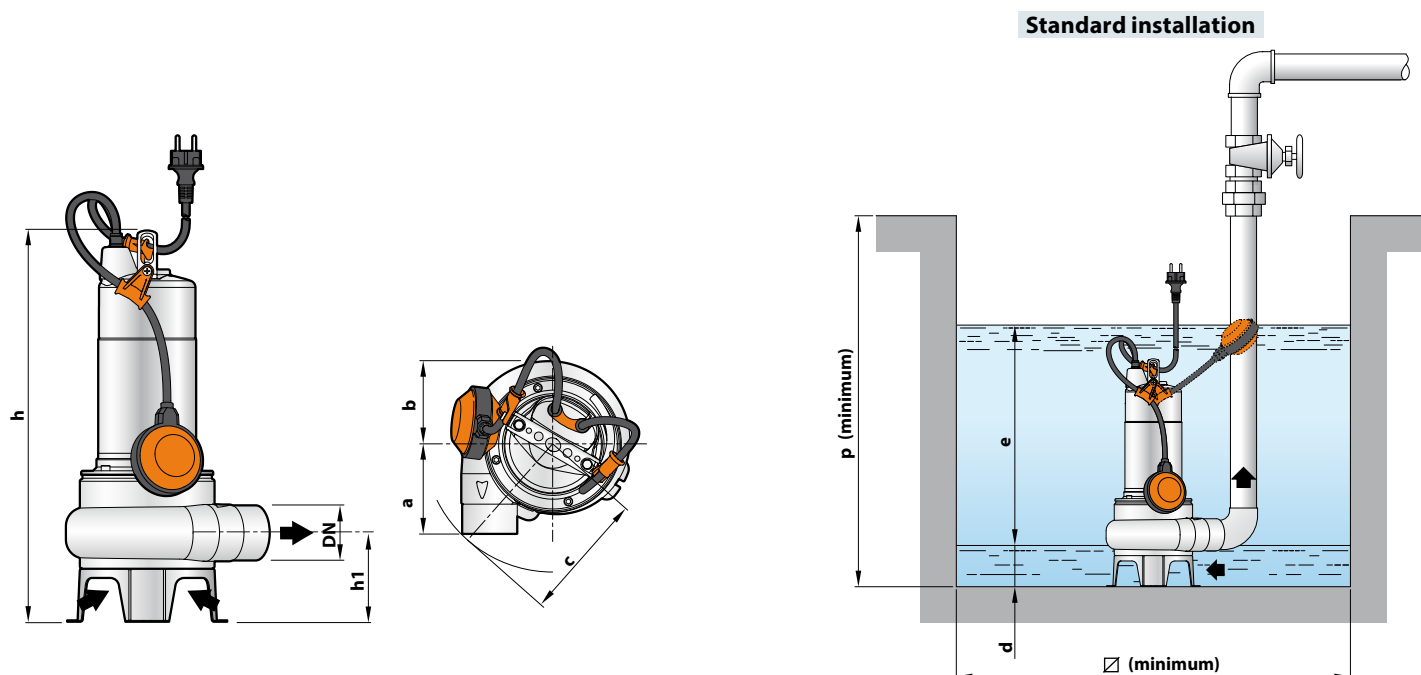

MODEL		PORT DN	Passage of solids	DIMENSIONS mm										kg	
Single-phase	Three-phase			a	b	c	h	h1	d	e	p	□		1~	3~
BCm 10/50-ST	BC 10/50-ST	2"	Ø 50 mm	102	95	145	430	102	60	variable	500	500		11.9	10.8
BCm 15/50-ST	BC 15/50-ST						445							13.5	12.5

ABSORPTION


MODEL	VOLTAGE		
	230 V	240 V	110 V
BCm 10/50-ST	5.0 A	4.8 A	10.0 A
BCm 15/50-ST	8.2 A	7.9 A	–

MODEL	VOLTAGE			
	230 V	400 V	240 V	415 V
BC 10/50-ST	3.7 A	2.1 A	3.5 A	2.0 A
BC 15/50-ST	5.6 A	3.2 A	5.4 A	3.1 A

PALLETIZATION

MODEL		GROUPAGE n. pumps	CONTAINER n. pumps
Single-phase	Three-phase		
BCm 10/50-ST	BC 10/50-ST	54	72
BCm 15/50-ST	BC 15/50-ST	54	72

BASE PEDESTAL KIT VX-ST – BC-ST

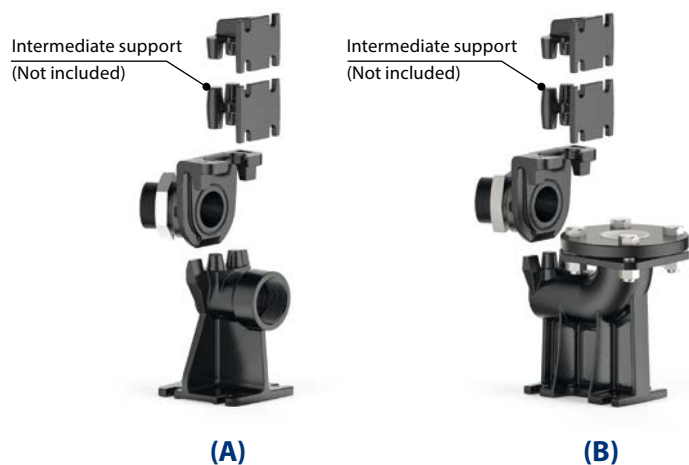

A) HORIZONTAL DELIVERY VERSION WITH ¾" GUIDE TUBES

For VX /35-ST	Cod. ASSPVX35ST	DN 2"
For VX /50-ST , BC /50-ST	Cod. ASSPVX50ST	DN 2"

Kit consisting of:

- footing connection
- slide guide with ring nut and seal
- support for the guide tubes

B) VERTICAL DELIVERY VERSION WITH ¾" GUIDE TUBES

For VX /35-ST	Cod. ASSPVX35STV	DN 2"
For VX /50-ST, BC /50-ST	Cod. ASSPVX50STV	DN 2½"

Kit consisting of:

- footing connection complete with counterflange
- slide guide with ring nut and seal
- support for the guide tubes

INTERMEDIATE SUPPORT (To be ordered separately)

Cod. 859SV340INTFA	For guide tubes Ø ¾"
--------------------	----------------------

GUIDE TUBES (AISI 304 stainless steel)

Cod. 54SARTG005	Ø ¾"
-----------------	------


In order to ensure stability, insert the intermediate support every 2 metres

Maximum length of the tube plank: 6 metres




STANDARD INSTALLATION

1. Pump
2. Footing connection
3. Guide tubes
4. Support for the guide tubes
5. Lifting chain
6. Control box
7. Alarm float switch
8. Starting float switch
9. Stop float switch
10. Non-return valve

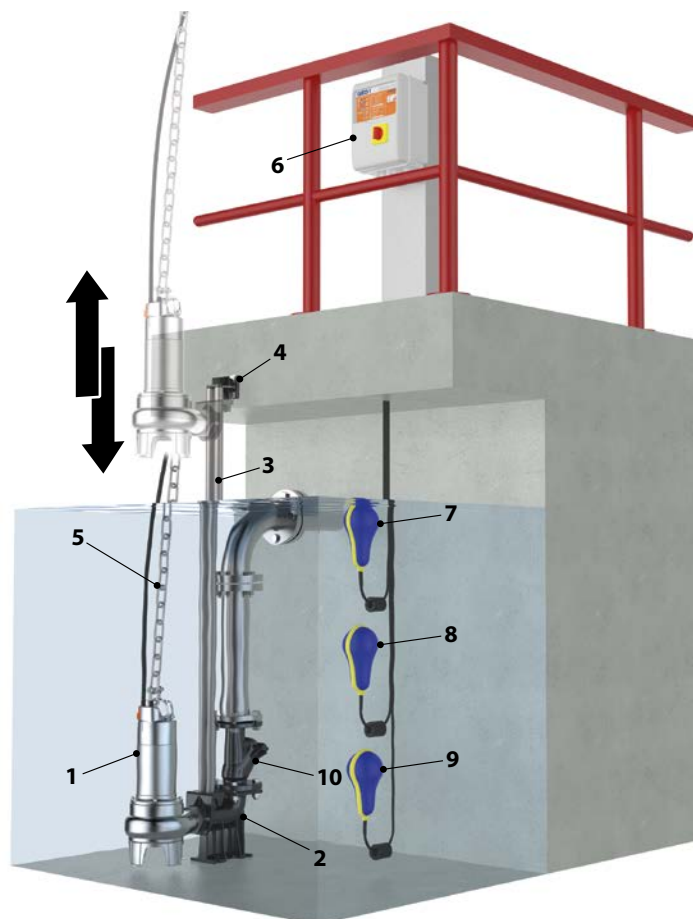


DIMENSIONS (Horizontal delivery version)

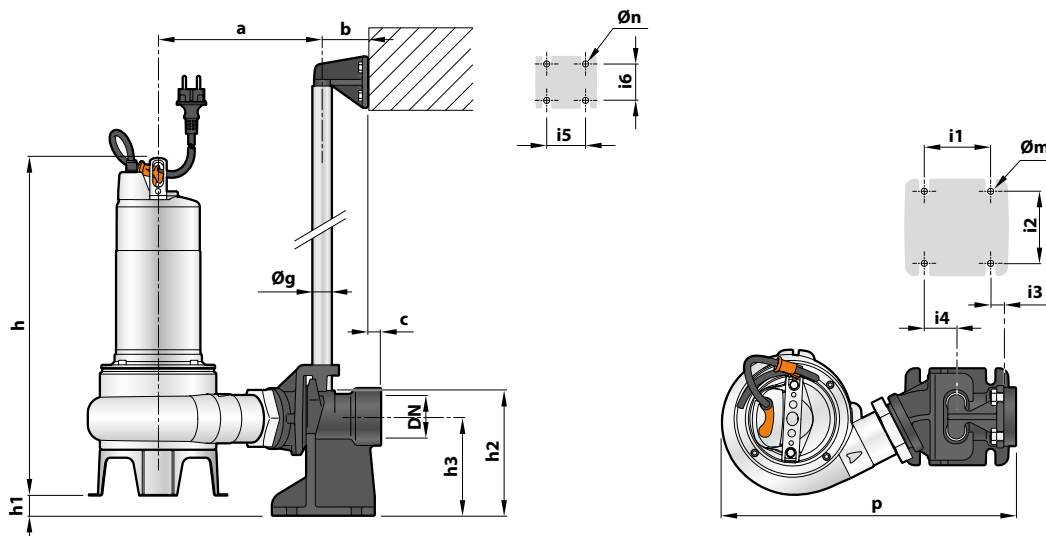

MODEL		Passage of solids mm	PORT DN	DIMENSIONS mm																
Single-phase	Three-phase			a	b	c	p	h	h1	h2	h3	i1	i2	i3	i4	i5	i6	Øg	Øm	Øn
VXm 8/35 -ST	VX 8/35 -ST	40	2"	207	61	17	379	406	43											
VXm 10/35 -ST	VX 10/35 -ST							421												
VXm 15/35 -ST	VX 15/35 -ST																			
VXm 8/50 -ST	VX 8/50 -ST							430												
VXm 10/50 -ST	VX 10/50 -ST	50	2"	217	61	17	388	445	28	130	165	85	94	16	40	50	48	¾"	12	11
VXm 15/50 -ST	VX 15/50 -ST							430												
BCm 10/50 -ST	BC 10/50 -ST							445												
BCm 15/50 -ST	BC 15/50 -ST							445												

DIMENSIONS (Vertical delivery version)

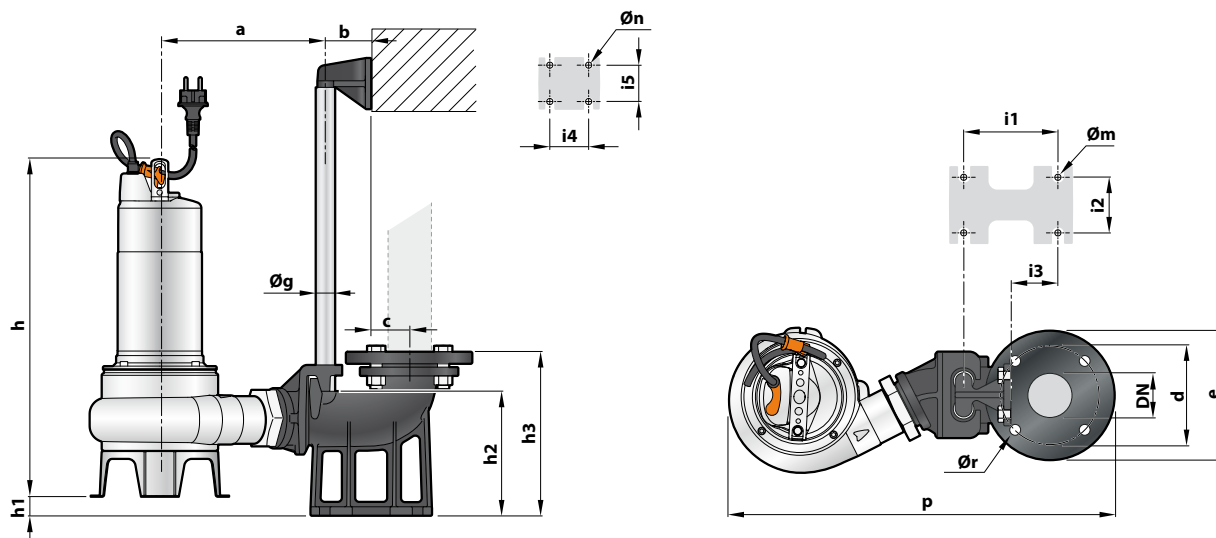

MODEL		Passage of solids mm	PORT DN	DIMENSIONS mm																																			
Single-phase	Three-phase			a	b	c	d	e	p	h	h1	h2	h3	i1	i2	i3	i4	i5	Øg	Øm	Øn	Ør																	
VXm 8/35 -ST	VX 8/35 -ST	40	2½"	207	61	52	125	165	495	406	40 26	164	215	120	72	62	50	48	¾"	14	11	18																	
VXm 10/35-ST	VX 10/35-ST									421																													
VXm 15/35-ST	VX 15/35-ST																																						
VXm 8/50 -ST	VX 8/50 -ST	50		217																					507	430													
VXm 10/50-ST	VX 10/50-ST																									445													
VXm 15/50-ST	VX 15/50-ST																									430													
BCm 10/50 -ST	BC 10/50 -ST																									445													
BCm 15/50-ST	BC 15/50 -ST																																						