

3G SLIM LINE SERIES FILTER HOUSINGS

SLIM DESIGN AND CHEMICAL COMPATIBILITY ARE AN IDEAL CHOICE FOR LOW-FLOW APPLICATIONS



Pentair 3G Slim Line[®] Housings are the perfect choice for low-flow filtration applications. Their slim design and high chemical compatibility make them ideal for those challenging applications.

Caps are manufactured from reinforced polypropylene in black, blue, and white. Three different style caps add to the flexibility of these housings. The mounting bracket cap allows the housing to be mounted to a single or multiple housing bracket.

The bracket is built into the integral bracket cap. The meter mount cap's gauges indicate when the cartridge is dirty and allow you to get the most out of your cartridges.

Housings are available with either clear or opaque sumps with the clear housings being manufactured of Styrene-Acrylonitrile (SAN) and the opaque housings are polypropylene. Clear housings offer on-site examination of the flow, cartridge life and performance. Opaque housings are molded from reinforced polypropylene and offer outstanding chemical compatibility.

FEATURES/BENEFITS

| | |
|---|--|
| 10" housings available with clear or opaque sump | Housing accepts DOE (double open end) cartridges |
| Buttress threads for additional strength and easier cartridge changes | Leak-proof seal |
| John Guest and NPT threaded connections offered in 1/4", 3/8", and 1/2" | Pressure relief button helps reduce pressure in housing when changing cartridges |
| Cap styles include mounting bracket, integral bracket, meter mount and optional pressure relief bleed valve | |

SPECIFICATIONS

| | |
|---|---|
| Housing – Polypropylene (opaque) or Styrene Acrylonitrile (clear) | O-Ring – #237 EPDM |
| Cap – Reinforced polypropylene | Temperature Rating- 40-125°F (4.4-51.7°C) |
| Button Assembly – 300-Series stainless steel, EPDM, and polypropylene | Maximum Pressure- 125 psi (8.6 bar) |

SPECIFICATIONS AND PERFORMANCE

| PART # | DESCRIPTION (#10 3G SLIM LINE) | MAXIMUM DIMENSIONS | INITIAL ΔP (PSI) @ FLOW RATE (GPM) |
|--------|---|----------------------------------|------------------------------------|
| 158598 | 1/4" Black/Blue Mounting Bracket Cap w/PR | 11.75" x 4.75" (298 mm x 121 mm) | 2 psi @ 3 gpm (0.14 bar @ 11 Lpm) |
| 158599 | 1/4" Blue/Clear Mounting Bracket Cap w/o PR | 11.75" x 4.75" (298 mm x 121 mm) | 2 psi @ 3 gpm (0.14 bar @ 11 Lpm) |
| 158601 | 1/4" White/White Mounting Bracket Cap w/o PR | 11.75" x 4.75" (298 mm x 121 mm) | 2 psi @ 3 gpm (0.14 bar @ 11 Lpm) |
| 158603 | 1/4" Black/Blue Quick-Change Mounting Bracket Cap w/PR | 11.75" x 4.75" (298 mm x 121 mm) | 2 psi @ 3 gpm (0.14 bar @ 11 Lpm) |
| 158604 | 1/4" Blue/Clear Quick-Change Mounting Bracket Cap w/o PR | 11.75" x 4.75" (298 mm x 121 mm) | 2 psi @ 3 gpm (0.14 bar @ 11 Lpm) |
| 158606 | 1/4" White/White Quick-Change Mounting Bracket Cap w/o PR | 11.75" x 4.75" (298 mm x 121 mm) | 2 psi @ 3 gpm (0.14 bar @ 11 Lpm) |
| 158637 | 1/4" Blue/Clear Integral Bracket Cap w/PR | 13.75" x 5.38" (349 mm x 137 mm) | 2 psi @ 3 gpm (0.14 bar @ 11 Lpm) |
| 158638 | 1/4" White/White Integral Bracket Cap w/PR | 13.75" x 5.38" (349 mm x 137 mm) | 2 psi @ 3 gpm (0.14 bar @ 11 Lpm) |
| 158639 | 1/4" Black/Blue Quick-Change Integral Bracket Cap w/PR | 13.75" x 5.38" (349 mm x 137 mm) | 2 psi @ 3 gpm (0.14 bar @ 11 Lpm) |
| 158641 | 1/4" White/White Quick-Change Integral Bracket Cap w/PR | 13.75" x 5.38" (349 mm x 137 mm) | 2 psi @ 3 gpm (0.14 bar @ 11 Lpm) |
| 158602 | 1/4" Black/Blue Quick Change Mounting Bracket Cap w/o PR | 11.75" x 4.75" (298 mm x 121 mm) | 2 psi @ 3 gpm (0.14 bar @ 11 Lpm) |
| 158608 | 3/8" Black/Blue Mounting Bracket Cap w/o PR | 11.75" x 4.75" (298 mm x 121 mm) | 2 psi @ 5 gpm (0.14 bar @ 19 Lpm) |
| 158610 | 3/8" Blue/Clear Mounting Bracket Cap w/o PR | 11.75" x 4.75" (298 mm x 121 mm) | 2 psi @ 5 gpm (0.14 bar @ 19 Lpm) |
| 158614 | 3/8" Black/Blue Quick-Change Mounting Bracket Cap w/o PR | 11.75" x 4.75" (298 mm x 121 mm) | 2 psi @ 5 gpm (0.14 bar @ 19 Lpm) |
| 158616 | 3/8" Blue/Clear Quick-Change Mounting Bracket Cap w/o PR | 11.75" x 4.75" (298 mm x 121 mm) | 2 psi @ 5 gpm (0.14 bar @ 19 Lpm) |
| 158619 | 3/8" White/White Quick-Change Mounting Bracket Cap w/o PR | 11.75" x 4.75" (298 mm x 121 mm) | 2 psi @ 5 gpm (0.14 bar @ 19 Lpm) |
| 158642 | 3/8" Black/Blue Integral Bracket Cap w/PR | 13.75" x 5.38" (349 mm x 137 mm) | 2 psi @ 5 gpm (0.14 bar @ 19 Lpm) |
| 158643 | 3/8" Blue/Clear Integral Bracket w/PR | 13.75" x 5.38" (349 mm x 137 mm) | 2 psi @ 5 gpm (0.14 bar @ 19 Lpm) |
| 158644 | 3/8" White/White Integral Bracket Cap w/PR | 13.75" x 5.38" (349 mm x 137 mm) | 2 psi @ 5 gpm (0.14 bar @ 19 Lpm) |
| 158647 | 3/8" White/White Quick-Change Integral Bracket w/PR | 13.75" x 5.38" (349 mm x 137 mm) | 2 psi @ 5 gpm (0.14 bar @ 19 Lpm) |
| 158620 | 1/2" Black/Blue Mounting Bracket Cap w/o PR | 11.75" x 4.75" (298 mm x 121 mm) | 2 psi @ 5 gpm (0.14 bar @ 19 Lpm) |
| 158621 | 1/2" Black/Blue Mounting Bracket Cap w/PR | 11.75" x 4.75" (298 mm x 121 mm) | 2 psi @ 5 gpm (0.14 bar @ 19 Lpm) |
| 158622 | 1/2" Blue/Clear Mounting Bracket Cap w/o PR | 11.75" x 4.75" (298 mm x 121 mm) | 2 psi @ 5 gpm (0.14 bar @ 19 Lpm) |
| 158623 | 1/2" Blue/Clear Mounting Bracket Cap w/PR | 11.75" x 4.75" (298 mm x 121 mm) | 2 psi @ 5 gpm (0.14 bar @ 19 Lpm) |
| 158625 | 1/2" Black/Blue Quick-Change Mounting Bracket Cap w/o PR | 11.75" x 4.75" (298 mm x 121 mm) | 2 psi @ 5 gpm (0.14 bar @ 19 Lpm) |
| 158648 | 1/2" Black/Blue Integral Bracket w/PR | 13.75" x 5.38" (349 mm x 137 mm) | 2 psi @ 5 gpm (0.14 bar @ 19 Lpm) |
| 158649 | 1/2" Blue/Clear Integral Bracket w/PR | 13.75" x 5.38" (349 mm x 137 mm) | 2 psi @ 5 gpm (0.14 bar @ 19 Lpm) |
| 158794 | 1/2" Black/Clear Integral Bracket w/PR | 13.75" x 5.38" (349 mm x 137 mm) | 2 psi @ 5 gpm (0.14 bar @ 19 Lpm) |

CAUTION: Protect against freezing to prevent cracking of the filter and water leakage.

ACCESSORIES

| PART # | DESCRIPTION |
|-----------|--|
| 150539 | SW-1A Wrench for Slim Line |
| 155003 | Cartridge Coupler for Standard Cartridges |
| 151121 | EPDM #237 O-ring for Slim Line |
| 158095 | Viton #237 O-ring for Slim Line |
| 158096 | Silicone #237 O-ring for Slim Line |
| 244047 | SL-ZP Kit - Zinc Plated Bracket for Slim Line |
| 357638 | SL-SS - Stainless Steel Bracket ONLY for Slim Line |
| 357644 | SL-SS Kit - Stainless Steel Bracket for Slim Line |
| 244046-00 | SL-ZP - Zinc Plated Bracket ONLY for Slim Line |
| 244627-02 | Two-Housing System Bracket |



13845 BISHOPS DR., SUITE 200, BROOKFIELD, WI 53005 USA
P: 262.238.4400 | WATERPURIFICATION.PENTAIR.COM
CUSTOMER CARE: 800.279.9404 | tech-supportpentair.com


© 2017 Pentair Residential Filtration, LLC. All rights reserved.

§For a detailed list of where Pentair trademarks are registered, please visit waterpurification.pentair.com/brands. Pentair trademarks and logos are owned by Pentair plc or its affiliates. Third party registered and unregistered trademarks and logos are the property of their respective owners.

310120 REV E DE17

PRESSURE DROP VS FLOW RATE

Based on 3G Slim Line

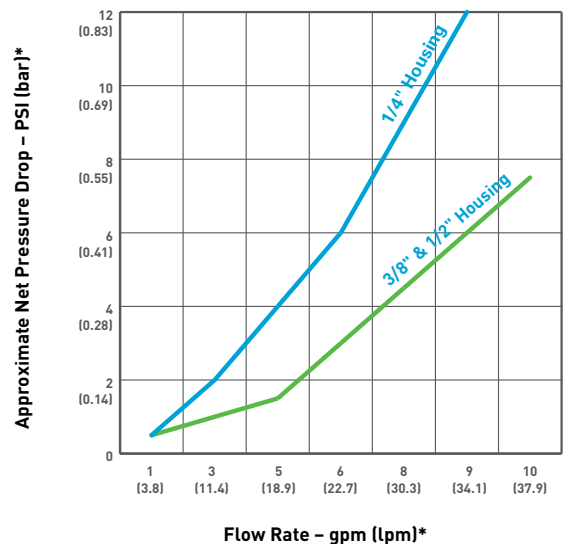

* Pressure drop and flow rate based on housing without cartridge.