



KIT LUBE



DISPENSERS



PUMPS



METERS



NOZZLE METERS



NOZZLES

GPV 2.0

FEATURES

- **READY TO USE**
- **COMPATIBLE WITH ALL FLUIDS (UNIVERSAL VERSION ONLY)**
- **QUICK RETROFIT INSTALLATION**
- **ADBLUE AND DIESEL VERSIONS NOW AVAILABLE**

The GPV 2.0 is the MCO2.0 version of the well known Piusi GPV. It includes a built-in solenoid valve and an oval gear meter, everything in a single device. It is available in several versions based on the fluid you need to control.

PERFORMANCE

LAN/WI-FI

CONNECTION SYSTEM

± 0,5%

ACCURACY

up to

30 L/MIN

(up to 7,8 gpm)

FLOW RATE



ENHANCED ERGONOMICS

Designed and built to operate constantly, with no surprises.

WI-FI CONNECTION

GPV 2.0 can be fully controlled remotely.



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FOO446010	3		180X180X170		-	1
FOO446000	3		180X180X170		-	1
FOO446060	5,7		350X180X260		-	1
FOO446030	3		180X180X170		-	1
FOO446050	4,3		350X180X260		-	1
FOO44608	4,3		350X180X260		-	1
FOO446070	3		180X180X170		-	1



WASTE OIL EQUIPMENTS



FILTRATION



FLUID MONITORING



HOSE REELS



ACCESSORIES



MERCHANDISE

INDEX



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

CHARTS

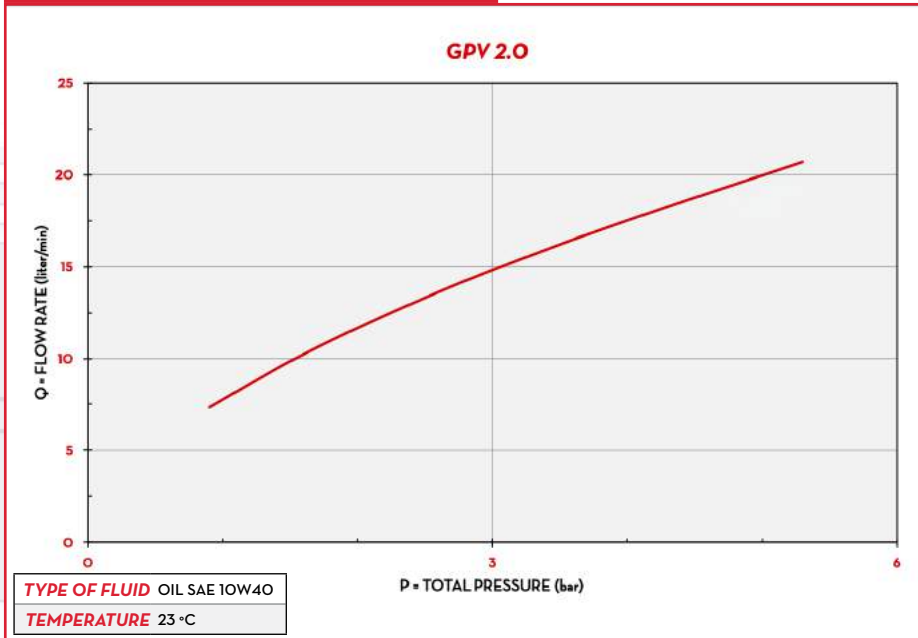

IN THE BOX

- GPV 2.0 UNIT
- INSTRUCTION MANUAL

MATERIALS

- GEARS: TECHNOPOLYMER
- BODY: ALLUMINIUM
- TOPPING: NBR
- VALVE: NBR, NICKEL PLATED STEEL, BRASS



TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE		CONNECTION
			L/MIN	GPM	AC V./HZ	POWER WATT	
FOO446010	GPV 2.0 BI VALVE	O	30	7,9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446000	GPV 2.0 SINGLE VALVE	O	30	7,9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446060	GPV 2.0 SINGLE VALVE REMOTE	O	30	7,9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446030	GPV 2.0 SINGLE VALVE WINDSCREEN	W	30	7,9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446070	GPV2.0 SINGLE VALVE ADBLUE	Ad	5 - 120	1,3 - 1,6	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446080	GPV2.0 SINGLE VALVE DIESEL	D	10 - 100	1,3 - 31,6	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446050	UNIVERSAL VALVE AND PULSER CONTROL	ANY	-	-	100-240 V/ 50-60 HZ	25	WI-FI / LAN

SHALL BE COMPLETED WITH A SUITABLE VALVE AND PULSER

GPV 2.0