



KIT LUBE



DISPENSERS



PUMPS



METERS



NOZZLE METERS



NOZZLES

GARDA

FEATURES

- **SELF-PRIMING**
- **IP65**
- **CONTINUOUS DUTY (AC VERSION)**
- **THERMAL PROTECTION**

The PIUSI Garda pump, suitable for the transfer of water, diesel and oil, consists of a gear pump that ensures greater power during transfer, in the event that the liquid being delivered has a low to medium viscosity. The PIUSI Garda electric pump is a self-priming device with a high degree of suction and is particularly suitable for the transfer of non-corrosive lubricating oils or viscous liquids.

PERFORMANCE

AC/DC
voltage

POWER

up to

10 L/MIN

FLOW-RATE



GARDA AC



GARDA DC

PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
NMT450000A	1,7	3,7	150X120X105	5,9X4,7X4,1	-	1
NMT450001A	1,7	3,7	150X120X105	5,9X4,7X4,1	-	1
NMT450002A	2,7	5,9	150X120X105	5,9X4,7X4,1	-	1
NMT450003A	2,7	5,9	150X120X105	5,9X4,7X4,1	-	1
NMT460000A	2,8	6,2	360X130X102	14,2X7,3X4	-	1
NMT460001A	2,8	6,2	360X130X102	14,2X7,3X4	-	1
NMT450006	6	13,2	360X130X102	14,2X7,3X4	-	1

WASTE OIL
EQUIPMENTS

FILTRATION

FLUID
MONITORING

HOSE REELS



ACCESSORIES



MERCHANDISE

INDEX



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

CHARTS

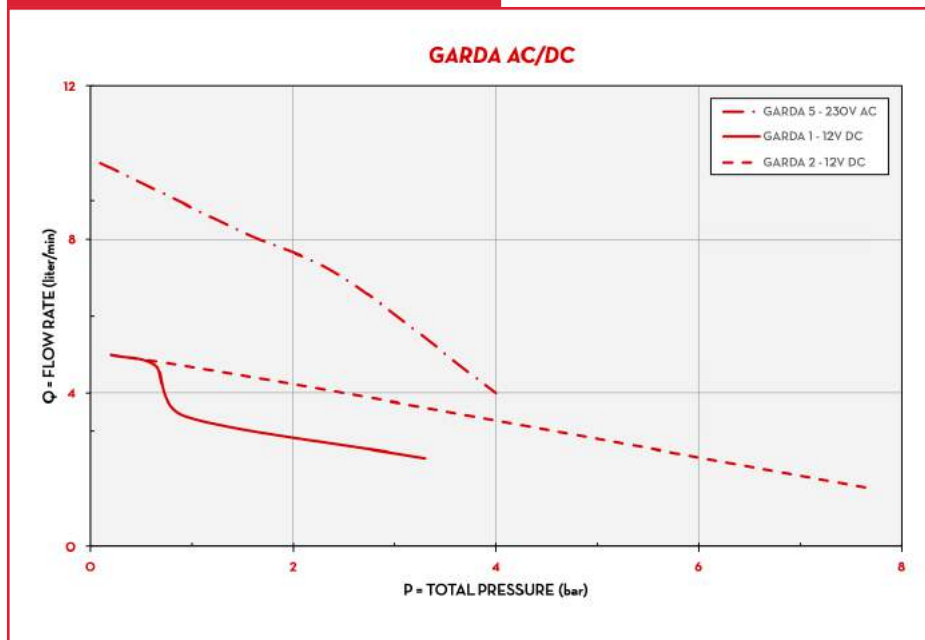

IN THE BOX

- GARDA PUMP
- INSTRUCTION MANUAL

DETAILS




BRONZE GEAR



ON/OFF SWITCH

DIMENSIONS

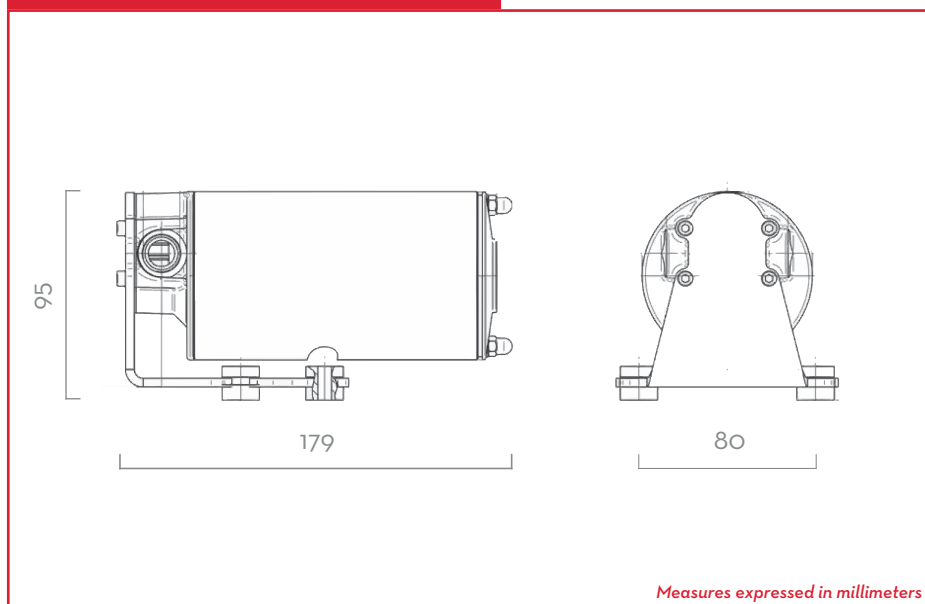

MATERIALS

- BODY: BRONZE
- SHAFT: STEEL
- GEARS: BRONZE

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		WORKING PRESSURE		VOLTS/HZ	MAX DRAW	FUSE	PORTS
			L/MIN	GPM	BAR	PSI				
NMT450000A	GARDA 1		8	2,1	1,5	22	12	12 A	-	3/8"
NMT450001A	GARDA 1		8	2,1	1,5	22	24	6 A	-	3/8"
NMT450002A	GARDA 2		10	2,6	3,5	50	12	19 A	-	3/8"
NMT450003A	GARDA 2		10	2,6	3,5	50	24	10 A	-	3/8"
NMT460000A	KIT GARDA 2		10	2,6	3,5	50	12	19 A	25 A	3/8"
NMT460001A	KIT GARDA 2		10	2,6	3,5	50	24	10 A	15 A	3/8"
NMT450006	GARDA 5		10	2,6	3,5	50	230/50	1,8 A	1,8 A	3/8"

GARDA