



FUEL MANAGEMENT
SYSTEMS



DISPENSERS



KITS



PUMPS



METERS



NOZZLES

PANTHER EX 56 DRUM

FEATURES

- STURDY STRUCTURE
- FLANGED COMPONENTS
- HIGH FLOW RATE
- HEAVY-DUTY USE
- CONTINUOUS DUTY
- MAGNETIC SWITCH



PERFORMANCE

UP TO
56 L/MIN

FLOW-RATE

1100 MM

SUCTION PIPE

±1%

ACCURACY

10µm (85%)

FILTERING CAPACITY



**PANTHER EX 56 DRUM
FO0582000**



**PANTHER EX 56 DRUM
FO0582010**



OUR PUMPS COMPLIES WITH THE FOLLOWING MARKING ATEX/IECEx

II	2	G	Ex	d	IIA	T4	Gb
GROUP	CATEGORY	TYPE OF EXPLOSIVE ATMOSPHERE	PERMANENT PREFIX	PROTECTION METHOD	GAS GLASS	TEMPERATURE CLASS	EQUIPMENT PROTECTION LEVEL

PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
FO0582000	18,3	40,3	400X240X300	15,7X9,4X11,8	1
FO0582010	21	46,2	400X240X300	15,7X9,4X11,8	1



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI



ANY BIODIESEL



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER




WINDSCREEN

CHART

PANTHER EX 56

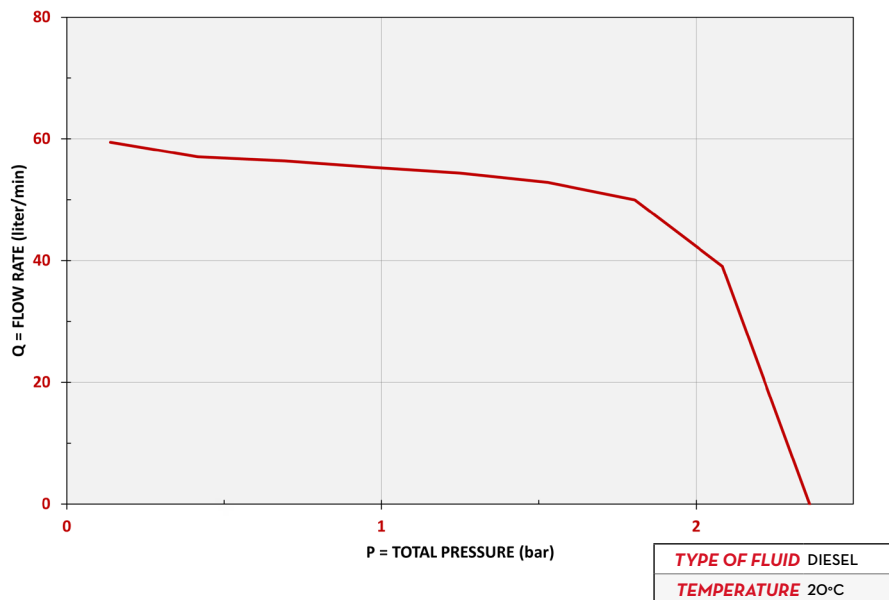

DIMENSIONS

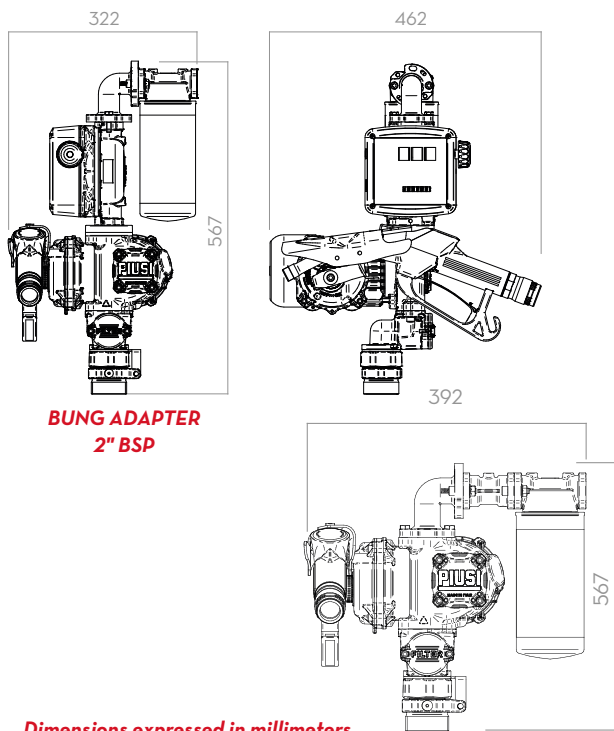

**BUNG ADAPTER
2" BSP**

Dimensions expressed in millimeters

**BUNG ADAPTER
2" BSP**

IN THE BOX

- TELESCOPIC SUCTION PIPE
- BUNG ADAPTER 2"
- PANTHER EX 56 PUMP
- K33 ATEX METER (ON SELECTED VERSION)
- GASOLINE FILTER E25 ATEX
- DELIVERY HOSE
- A60 ATEX AUTOMATIC NOZZLE
- INSTRUCTION MANUAL

DETAILS



COMPONENTI

- **PUMP:**
PANTHER EX 56
- **METER:**
K33 ATEX
- **AUTOMATIC NOZZLE:**
A60 ATEX
- **FILTER:**
GASOLINE FILTER E25 ATEX

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			METER	NOZZLE	FILTER	DELIVERY HOSE	
			L/MIN	GPM	AC V/Hz	POWER WATT	AMP. MAX.				LENGTH (M)	Ø (mm)
FO0582000	(EX) DRUM PANTHER EX 56 230V/50 AUTO/F	D G K	56	15	230V/50HZ	500	2.3	-	A60 ATEX	YES	4	20
FO0582010	(EX) DRUM PANTHER EX 56 230V/50 K33 AUT/F	D G K	56	15	230V/50HZ	500	2.3	K33 ATEX	A60 ATEX	YES	4	20

(*) AVAILABLE WITH DIFFERENT VOLTAGES AND 60 HZ FREQUENCIES.