


### TANK DIPPING TAPES CONFORMING TO THE IPM SPECIFICATION

- \* The dipping tapes on this page conform to the specifications contained in the Institute of Petroleum Measurement Manual Part II, and to the International Standard ISO/FDIS 4512.
- \* Each tape and weight is marked with its appropriate IPM number.
- \* The specification reflects the accumulated experience of the petrochemical industry over many years, and has been adopted in most parts of the world.
- \* It covers every component in detail, and lays down a maximum permitted error for the tape/weight combination of  $\pm 1.5\text{mm}$  for all lengths up to 30 metres. The brass swivel hook with knurled locking nut prevents accidental loss of the dip weight.
- \* The tapes are of 13mm wide carbon or stainless steel (grade 4021) and graduations are etched on one side only in feet, inches and 10ths of inches (IPM7a). Tapes graduated in feet, inches and 16ths of inches are available to special order (IPM7b).
- \* The frame winders are of brass with an oblique hardwood handle, and the brass dip weights are always supplied separately.
- \* Please contact us for any requirement under the IPM Specification not shown on this page.

#### ETCHED CARBON STEEL TAPE ON BRASS FRAME WINDER WITHOUT WEIGHT

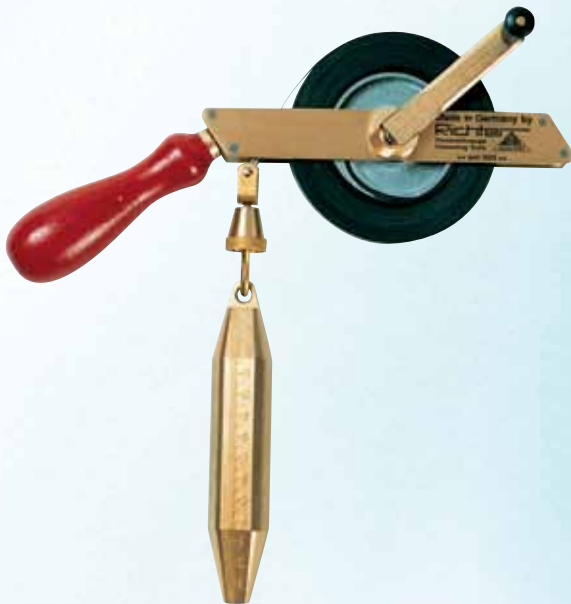

#### EMPTY BRASS FRAME



#### Part Number

FR-EMPTY-F.W-30

For tapes up to 30m

#### IPM BRASS DIP WEIGHTS



Standard Weight

1.5lbs

Heavy Weight

3.5lbs

#### TAPES WITH FRAMES

Part Number	Length
FR-D-IPM7-414-33	33ft
FR-D-IPM7-414-50	50ft
FR-D-IPM7-414-66	66ft
FR-D-IPM7-414-75	75ft
FR-D-IPM7-414-100	100ft

#### REFILL TAPES

Part Number	Length
FR-D-IPM7-414A-33	33ft
FR-D-IPM7-414A-50	50ft
FR-D-IPM7-414A-66	66ft
FR-D-IPM7-414A-75	75ft
FR-D-IPM7-414A-100	100ft

#### Part Number

FR-WEIGHT-B-1Z

FR-WEIGHT-WZ

#### Weight Graduations

1.5lbs inches 10ths

3.5lbs inches 10ths