



20-150/NM/AC & 20-150/NM/DC – Single Phase Non-Mercury Switches

Valve mounted changeover switches provide position status via a robust volt free changeover switch, rated to **230V AC** and **24V DC**, rated non-mercury normally open switches.

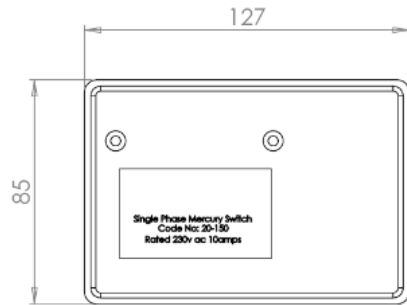





Single Phase:
20-150/NM/AC

**2.5A Hybrid Tilt Switch –
Mercury Free 230V AC 0.1
-2.5amp SPST non-mercury**

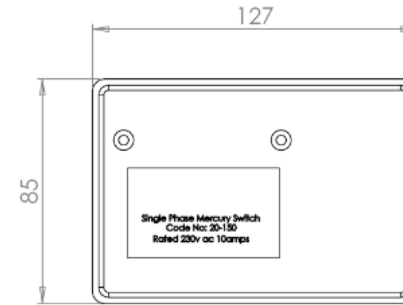

Single Phase:
20-150/NM/DC

**Encapsulated Tilt Switch
– Mercury Free 24V DC
1amp SPST non-mercury**

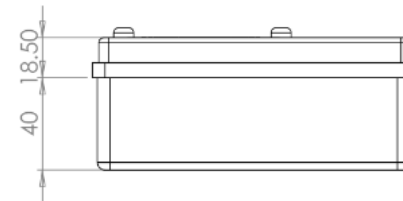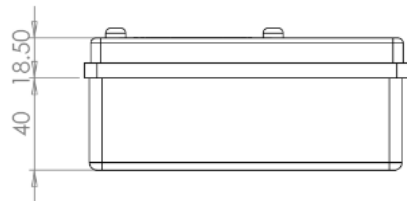

Dimensions:

125 x 85 x 60mm Deep
ABS enclosure.


Fixing Dimensions:

2 No 6.5mm diameter
holes

Centres:


102mm Wide to suit Fire
Valve lever drilling.

**Wiring Details –
20-150/NM/AC**



* All information is sourced from our manufacturer's data and is intended for guidance only – FEL Valves Ltd can accept no liability for changes, omissions or errors.

**Wiring Details –
20-150/NM/DC**



Dimensions:

150 x 100 x 60 Deep
ABS enclosure.

Fixing Dimensions:

2 No 6.5mm diameter
holes

Centres:

102mm Wide to suit Fire
Valve lever drilling.