

02

TODO-GAS

SAFE TRANSFER OF LPG IN BOTH LIQUID AND VAPOUR PHASES

Improve profit margins, environmental credentials and operator safety when transporting liquid petroleum gas. Specifically designed for the safe transfer of LPG, TODO-GAS couplings are composed of materials ideal for the unique properties of LPG and terminal handling properties. TODO-GAS 1" and 2" products have dimensionally different connection geometry to restrict product cross-contamination. Their unrivalled technology also significantly reduces emissions and removes the risk of operator freeze burns.

TODDO

TODDO-MATIC®

TODDO-GAS

NGX SERIES

MARINE BREAK-AWAY

TODDO® SAFETY PRESSURE TIGHTCAP (PTC)

AVIATION COUPLINGS

TODDO® FUEL NOZZLES

BALL VALVES


TODDO® SWIVEL




TODO

1" TODO-GAS

DN19
DN32
Ø56 mm



HOW
IT
WORKS

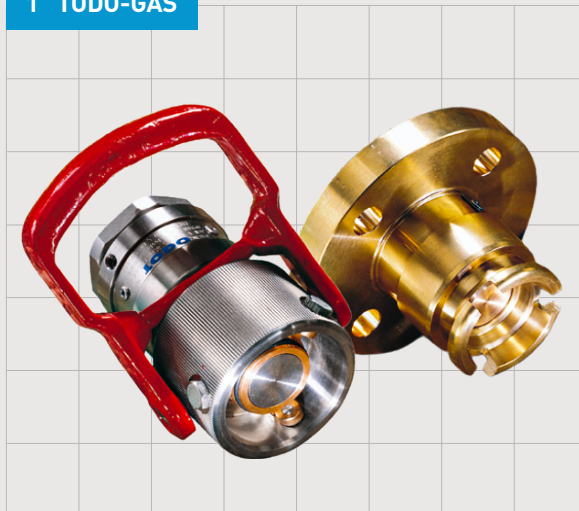

TODO-MATIC®

TODO-GAS

NGX SERIES

MARINE BREAK-AWAY

TODO® SAFETY PRESSURE TIGHTCAP (PTC)

AVIATION COUPLINGS

TODO® FUEL NOZZLES

BALL VALVES

TODO® SWIVEL

- Suitable for a range of LPG applications
- Heavy duty autogas vehicle refuelling
- Advanced vapour recovery systems
- Easy to connect and disconnect
- Single-handed operation
- Ultra-low release on disconnect: 0.15cc per disconnection
- Suitable for indoor fuelling
- Handles up to 200 litres/minute (52 USG/MIN)
- Minimal pressure drop

READ MORE

REQUEST A QUOTE



TODO

2" TODO-GAS

DN40
DN50
Ø71 mm
→



HOW
IT
WORKS



TODO-MATIC®

TODO-GAS

NGX SERIES

MARINE BREAK-AWAY

TODO® SAFETY PRESSURE TIGHTCAP (PTC)

AVIATION COUPLINGS

TODO® FUEL NOZZLES

BALL VALVES

TODO® SWIVEL

- Ideal for bobtails or immediate bulk delivery trucks
- Rugged construction
- Suitable for frequent use
- Can cope with almost any loading equipment configuration
- Ultra low release on disconnect: 0.35cc per disconnection

READ MORE

REQUEST A QUOTE



TODO

3" TODO-GAS

DN80
Ø119 mm
→



HOW
IT
WORKS



TODO-MATIC®

TODO-GAS

NGX SERIES

MARINE BREAK-AWAY

TODO® SAFETY PRESSURE TIGHTCAP (PTC)

AVIATION COUPLINGS

TODO® FUEL NOZZLES

BALL VALVES

TODO® SWIVEL

- Unrivalled suitability for larger or high flow rate applications
- Typically used for rail tank loading and discharge
- Handles flows of up to 2,500 litres/minute (658 USG/MIN)
- Two-handle operation
- Robust integral swivel
- Designed to withstand regular use at terminal

READ MORE

REQUEST A QUOTE





DUST PLUGS AND DUST CAPS



TODO-MATIC®

TODO-GAS

NGX SERIES

MARINE BREAK-AWAY

TODO® SAFETY PRESSURE TIGHTCAP (PTC)

AVIATION COUPLINGS

TODO® FUEL NOZZLES

BALL VALVES

TODO® SWIVEL

- Prevent ingress of dirt or water
- Materials:
 - 1" and 2" sizes: rubber
 - 3" size: stainless steel, brass/gunmetal and aluminium

READ MORE

REQUEST A QUOTE



TODO**PRESSURE RELIEF VALVE FOR TANK UNIT**

- Highly recommended in applications where back-pressure build-up is common. Enables a small amount of pressure to be released in the hose unit to ease coupling motion

**PARKING DEVICE**

- Provides a position for safe storage of hose units when not in use

**LONG DOUBLE HANDLE 2"**

- Enables easier coupling motion, especially in applications where space is restricted at the connection point

[READ MORE](#)[REQUEST A QUOTE](#)

TODO-MATIC®

TODO-GAS

NGX SERIES

MARINE BREAK-AWAY

TODO® SAFETY PRESSURE TIGHTCAP (PTC)

AVIATION COUPLINGS

TODO® FUEL NOZZLES

BALL VALVES

TODO® SWIVEL

