


Part Number: ZVF 25.1AF1 ER339R D ES 336.1 GKG25 EKG1200

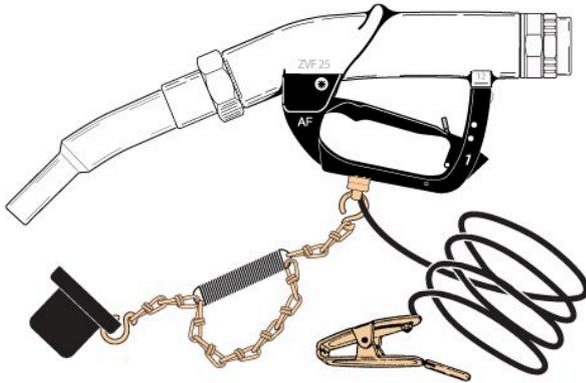

© ELAFLEX HIBY, Hamburg / Germany

https://nozzleconfigurator.elaflex.co.uk/NON_AUTO_AIR/1433/22234/21467/21945/21714/20819/21480/21716/21719/21721/21904/21725/22485/Product15.html

Nozzle Type	<p>ZVF 25 Manually operated nozzle DN 25 Max. flowrate 140 l/min. Overwing refuelling for small and medium sized aircraft with AVGAS or JET aviation fuel.</p>
Body	<p>ZVF 25 for aircraft refuelling Standard</p>
Hose Inlet	<p>EA 075.1 1" BSP female Aluminium / stainless steel</p>
Guard	<p>EG 281.1 AF D Guard No 1 AF D</p>
Spout	<p>ER 339 R Reduced spout Special Type OD 21 mm.</p>
Latching	<p>Without latch Pin Deadman function Without hold-open function.</p>
Working Pressure	<p>Standard Working Pressure 0,5 to 3,5 bar.</p>
Strainer	<p>ES 336.1 Standard strainer Positioned within spout. 100 mesh (160 my).</p>
Dust Cap Assembly	<p>GKG 25 GKG 25 Dust Cap Assembly To contain remaining drips within the spout. Assembly is mounted to the guard by Elaflex.</p>
Ground Cable Assembly	<p>With EKG 1200 Ground Cable Assembly EKG 1200 With brass clamp, wire plastic coated. 1200 mm length. Assembly is mounted to the guard by Elaflex.</p>

Sight Glass

Without sight glass

Without

Sight Glass Strainer

Without sight glass strainer

Without

Note, for aircraft refuelling it is advisable to use additional strainers.

Sticker

Without sticker

Without

PDF Documents

 Page 537-538 (ZVF 25)

Contact:

ELAFLEX Limited
Riverside House,
Plumpton Road
Hoddesdon, Herts EN11 0PA
United Kingdom
Phone No.: +44 (0)1992 452 950
Internet: www.elaflex.co.uk