


Part Number: ZVF 25.1AF1 ER339JET D ES 336.1 GKG25 EKG1200

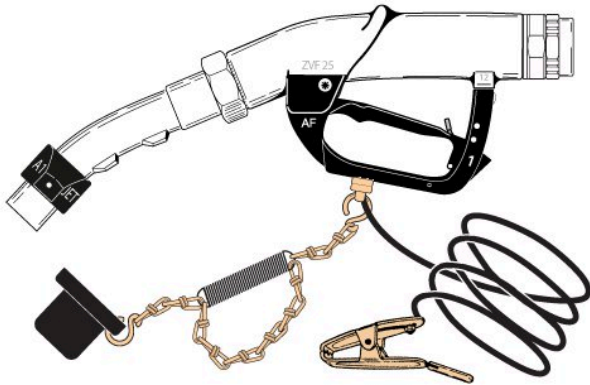

© ELAFLEX HIBY, Hamburg / Germany

<https://nozzleconfigurator.elaflex.co.uk/NON AUTO>

[AIR/1433/22234/21467/21945/21715/20819/21480/21716/21719/21721/21904/21725/22485/Product15.html](https://nozzleconfigurator.elaflex.co.uk/AIR/1433/22234/21467/21945/21715/20819/21480/21716/21719/21721/21904/21725/22485/Product15.html)

Nozzle Type	ZVF 25 Manually operated nozzle DN 25 Max. flowrate 140 l/min. Overwing refuelling for small and medium sized aircraft with AVGAS or JET aviation fuel.
Body	ZVF 25 for aircraft refuelling Standard
Hose Inlet	EA 075.1 1" BSP female Aluminium / stainless steel
Guard	EG 281.1 AF D Guard No 1 AF D
Spout	ER 339 JET For JET fuels OD 52 × 70 mm.
Latching	Without latch Pin Deadman function Without hold-open function.
Working Pressure	Standard Working Pressure 0,5 to 3,5 bar.
Strainer	ES 336.1 Standard strainer Positioned within spout. 100 mesh (160 my).
Dust Cap Assembly	GKG 25 GKG 25 Dust Cap Assembly To contain remaining drips within the spout. Assembly is mounted to the guard by Elaflex.
Ground Cable Assembly	With EKG 1200 Ground Cable Assembly EKG 1200 With brass clamp, wire plastic coated. 1200 mm length. Assembly is mounted to the guard by Elaflex.
Sight Glass	Without sight glass

Sight Glass Strainer

Without

Without sight glass strainer

Without

Note, for aircraft refuelling it is advisable to use additional strainers.

Sticker

Without sticker

Without

PDF Documents

 Page 537-538 (ZVF 25)

Contact:

ELAFLEX Limited
Riverside House,
Plumpton Road
Hoddesdon, Herts EN11 0PA
United Kingdom
Phone No.: +44 (0)1992 452 950
Internet: www.elaflex.co.uk