



KIT LUBE



DISPENSERS



PUMPS



METERS



NOZZLE METERS



NOZZLES

# GREASE HOSE REEL

## FEATURES

- HEAVY DUTY SPRING
- HAND PROTECTION (ON REQ.)
- WIDE RANGE OF PRODUCTS
- LONG LASTING
- STEEL HUB
- HIGH PRESSURE

The Piusi OPEN HOSE REEL for grease, manufactured according to the most demanding requirements is suitable for all grease heavy duty applications.

## PERFORMANCE

max

**400BAR**

MAX WORKING PRESSURE

**15M**

HOSE LENGTH



HOSE REEL OPEN FOR GREASE

## PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	PCS/PALLET	PCS/BOX
<b>WITHOUT HOSE</b>					
HN40151400A	14	30,8	550X200X540		1
HN40153800A	14	30,8	550X200X540		1
<b>WITH HOSE</b>					
HA40151400	27	60	550X260X540		1
HA40153800A	25	55	550X260X540		1



WASTE OIL EQUIPMENTS



FILTRATION



FLUID MONITORING



HOSE REELS



ACCESSORIES



MERCHANDISE

INDEX



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



WATER




WINDSCREEN


## INSTALLATION

Different ways to install PIUSI's hose reels: they can be easily placed wherever you need them without any problem about functionality and safety. PIUSI's products are without a doubt designed to support your work in any condition.


ROOF  
INSTALLATION



WALL  
INSTALLATION



GROUND  
INSTALLATION



## IN THE BOX

- REEL
- WALL MOUNT BRACKET
- INSTRUCTION MANUAL

## DETAILS



4 ROLLS HOSE GUIDE



STURDY DESIGN




DIFFERENT INSTALLATIONS

## DIMENSIONS

MODEL OPEN HOSE  
REEL SMALL

MODEL	OPEN HOSE REEL SMALL
A	475
B	460
C	102
D	150
E	196
F	150
G	150
H	12

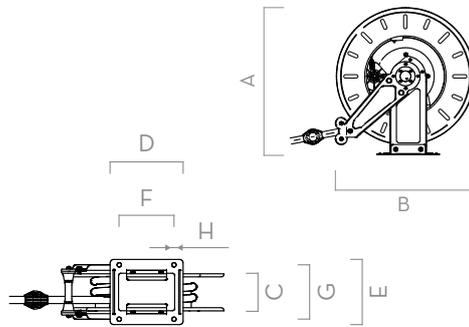

Measures expressed in millimeters

## MATERIALS

- BODY: CAST IRON
- HUB: SYNTHETIC STEEL
- TUBE: RUBBER

## TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	HOSE	MAX WORKING PRESSURE	PRESSURE DROP	INLET WITH SWIVEL	OUTLET HOSETAIL	HOSE MAX LENGTH BOUND	HOSE LENGTH
			BSP	BAR	BAR	BSP	BSP	M	M
<b>WITHOUT HOSE</b>									
HN40151400A	OPEN HOSE REEL 1/4" 15MT SMALL	G	1/4"	400	-	1/4" FEMALE	1/4" FEMALE	15	-
HN40153800A	OPEN HOSE REEL 3/8" 15MT SMALL	G	3/8"	400	-	3/8" FEMALE	3/8" FEMALE	15	-
<b>WITH HOSE</b>									
HA40151400	OPEN HOSE REEL 1/4" + 15MT HOSE SMALL	G	1/4"	400	160 @ 600 GR/MIN*	1/4" FEMALE	1/4" FEMALE	-	15
HA40153800A	OPEN HOSE REEL 3/8" + 15MT HOSE SMALL	G	3/8"	400	140 @ 600 GR/MIN*	3/8" FEMALE	3/8" FEMALE	-	15

(\*) PRESSURE DROP FOR GREASE NLGI 2.5 (\*\*) PRESSURE DROP FOR GREASE NLGI 2

# GREASE HOSE REEL

OPEN

161