
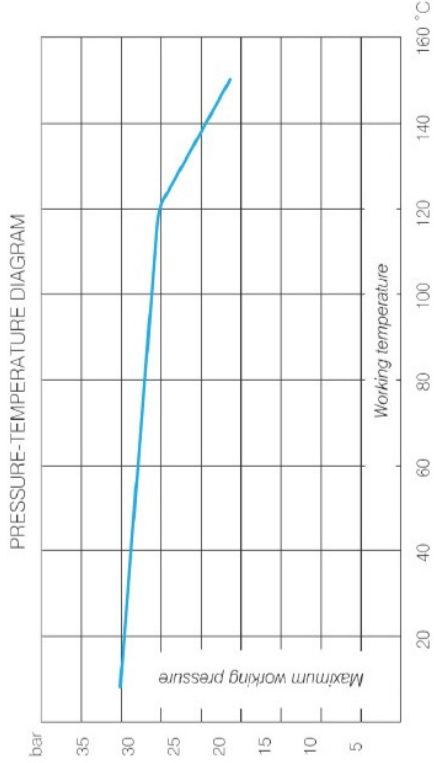




CHECK VALVE MEDIUM PRESSURE 304

1/4" TO 1/2" SIZES

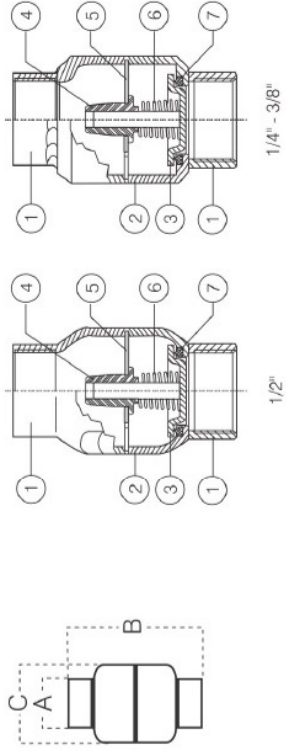

Components	Version Aisi 304
1 Threaded ends	1.4304 EN 10088
2 Body valve	1.4304 EN 10088
3 Flow control disc	1.4304 EN 10088
4 Guide bush	PTFE
5 Bush support	1.4304 EN 10088
6 Spring	1.4304 EN 10088
7 Seal ring	FPM

3/4" TO 4" SIZES

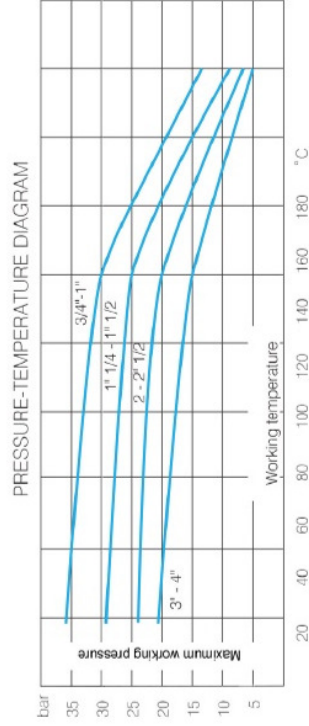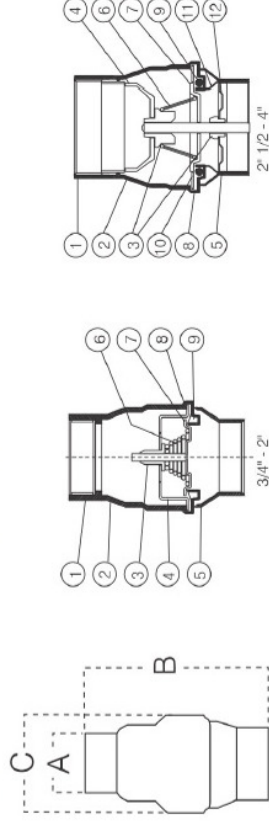

Components	Version Aisi 304
1 Outlet end	1.4304 EN 10088
2 Valve body	1.4304 EN 10088
3 Guide bush	PTFE
4 Flow control disk guide	1.4304 EN 10088
5 Inlet end	1.4304 EN 10088
6 Spring	1.4304 EN 10088
7 Flow control disk	1.4304 EN 10088
8 Seal ring housing	1.4304 EN 10088
9 Seal ring	FPM
10 Seal ring retainer	1.4304 EN 10088
11 Seal ring support	1.4304 EN 10088
12 Outlet side guide	1.4304 EN 10088

Sizes 1/4" to 4"
Material 304 stainless steel
Threaded BSPP to ISO 228/1
Compact size
Suitable for corrosive and abrasive fluids
FPM Seal for -20C to 150C
316 Also available

SIZE BSPP (A)	PART No	B	C	OPENING PRESSURE (BAR)	Kg
1/4	CRO04	55	32	0.25	0.115
3/8	CRO06	55	32	0.25	0.115
1/2	CRO08	55	32	0.25	0.115
3/4	CRO12	66.7	44	0.30	0.129
1	CRO16	83	53	0.30	0.191
1 1/4	CRO20	97	62	0.30	0.281
1 1/2	CRO24	115	78	0.30	0.388
2	CRO32	120.5	89	0.30	0.704
2 1/2	CRO40	141	113	0.30	1.425
3	CRO48	164	132	0.30	2.085
4	CRO64	191	167	0.30	3.415