



GAMMON TECHNICAL PRODUCTS, INC.
 P.O. BOX 400 - 2300 HWY 34
 MANASQUAN, N.J. 08736

PHONE 732-223-4600
 FAX 732-223-5778
 WEBSITE www.gammontech.com
 STORE www.gammontechstore.com

**PORTABLE
 PUMP**


**BULLETIN 49
 (08-98)**

SERVICEMAN'S PORTABLE PUMP



Discharge hose →

↑
 12 volt explosion proof pump
 driven by truck battery

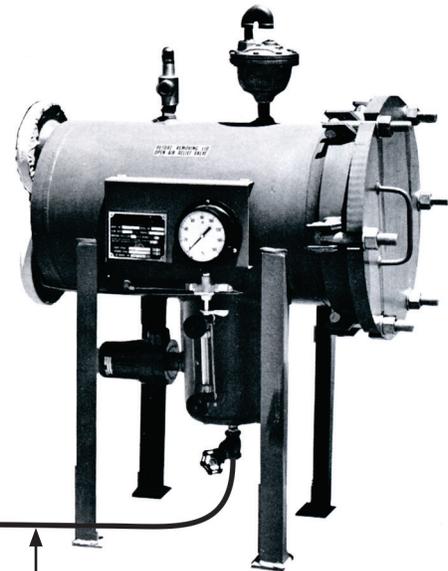

↑
 Suction hose connects to a vessel to be emptied
 or can be lowered into underground tank to
 draw from the sump.

TECHNICAL DATA

Positive Displacement Pump
 Suitable for Gasoline, Diesel, and Jet Fuels
 12 ft. Cable - Shielded Clips

WEIGHT 45 lbs.
 DUTY CYCLE 30 min. on, 30 min. off
 POWER See model numbers
 (explosion proof motor - Class 1,
 Division 1)
 SUCTION HOSE 3/4" x 12'
 DISCHARGE HOSE 3/4" x 12'
 FLOW RATE 14 gpm

HOW TO ORDER

Model	GTP-1288-1	12 volt DC motor
	GTP-1288-2	24 volt DC motor
	GTP-1288-3	115 volt AC motor

OPTIONS: Suction strainer GTP-1289
 Special length hose
 Quick disconnect hose fittings

INSTRUCTIONS

Connect the suction and discharge hoses as desired. Attach cable clips to battery. Turn on the switch. Open filter vent.

NOTE: The D.C. pump has a permanent magnet motor and must be connected correctly or it will run backwards.