





DISPENSERS









SB325_X METER

FEATURES

- · HEAVY DUTY
- VERSATILE
- BUILT-IN TURBINE METER
- BREAK-AWAY SYSTEM
- MULTI-FUNCTIONAL DISPLAY

The Piusi SB325_X METER is the patented automatic nozzle-meter by Piusi for AdBlue®. It is composed by an innovative technopolymer casing, a break-away system, a stainless steel spout and the Piusi K24 meter with 1% accuracy.

Safety is guaranteed by the break-away system. In the event that a vehicle accidentally drives away with the nozzle still in the tank, the spout is designed to detach from the nozzle. This system also allows for a quick repair by merely fitting a new spout onto the nozzle.

PERFORMANCE



3,5 BAR

UP TO
45 L/MIN
FLOW RATE





SB325_X METER

PACKAGING													
CODE	WE	GHT	PACKAGING										
	KG	LBS	ММ	INCH	PCS/BOX								
F0061701A	1,0	2,2	447X178X63	17,6X7X2,5	1								













INDEX

























SB325_X METER SB325_X METER 10 10 10 10 10 15 15 2 TYPE OF FLUID WATER P = TOTAL PRESSURE (bar)

IN THE BOX

- SB325_X NOZZLE
- INSTRUCTION MANUAL


DETAILS





DIMENSIONS

TEMPERATURE

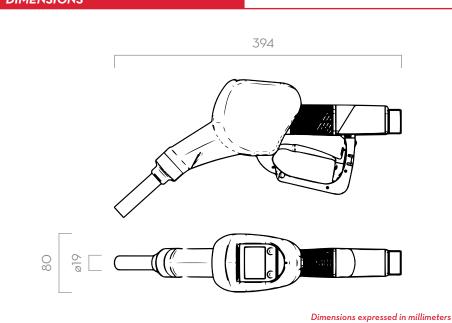

MATERIALS

- SPOUT: STAINLESS STEEL
- BODY: TECHNOPOLYMER
- TURBINE: TECHNOPOLYMER

TECHNICAL DATA													
CODE	DESCRIPTION.	FLUIDS TYPE	FLOW-RATE		MAGNETIC	VETER	PRESSURE		6340VE1	SPOUT			
	DESCRIPTION		L/MIN	GPM	ADAPTOR	METER	BAR	INLET	SWIVEL	EXT. Ø			
F0061701A	AUTOMATIC NOZZLE SB325_X METER	(Ad) W	45	12	NO	YES	3,5	3/4"	YES	19 MM			

SB325_X METER